


## Product Introduction

NRW200Y-G/265Y-G/300Y-G series air compressors adopt oil pump lubrication. It has stable performance and compact design structure. The standard configuration includes two filling hoses and two filling valves, which can simultaneously inflate two cylinders to improve efficiency. It's applicable for use in firefighting, diving, chemical, rescue, etc.

## Features

- Air quality conforms to EN12021
- CE, ISO9001 certificates
- 3 stage compression design
- Providing 225 Bar/330 Bar filling pressure for options
- Lubrication method: oil pump
- Cooling method: air cooling
- Manual stop is standard
- Automatic stop is optional

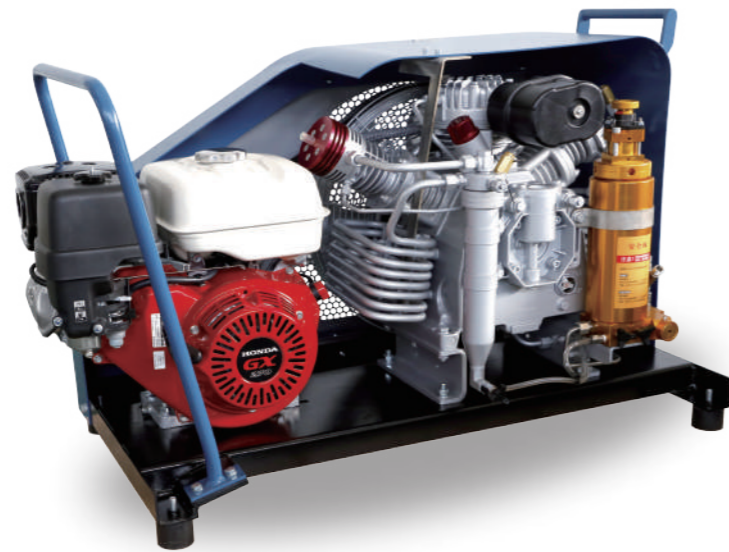

## Technical Data


Model	NRW200Y-G	NRW265Y-G	NRW300Y-G
Charging rate (L/min)	200	265	300
Max. pressure (bar)	225/330	225/330	225 / 330
Number of stages	3	3	3
Drive	Honda 4-stroke Petrol engine	Honda 4-stroke Petrol engine	Honda 4-stroke Petrol engine
Speed (rpm)	1200	1600	1800
Power (kw)	5.1	5.1	5.1
Horse (hp)	7	7	7
Weight (kg)	115	115	115
Dimension (mm)	1100*520*700	1100*520*700	1100*520*700
Air supply interface	G5/8"	G5/8"	G5/8"

Note: Motors with different voltages of 50HZ or 60HZ can be customized.


## Standard Configuration



## Optional Configuration

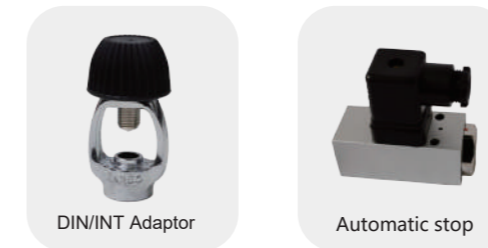

## Product Details

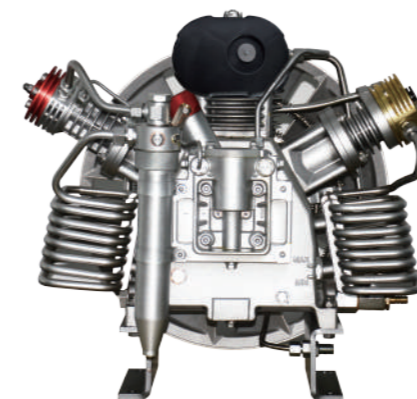

Compressor block



Honda 4-stroke Petrol engine