

Product Introduction

NRW200/265/300 series air compressor has relatively light weight and small size which allows mobility and portability. It's equipped with two filling hoses and two filling valves, which can simultaneously inflate two cylinders to improve efficiency. It's applicable for use in firefighting, diving, chemical, mining, rescue, etc. This series can be driven by three-phase motor or gasoline engine to meet different application needs.



Features


- Air quality conforms to EN12021
- CE, CCS, ISO9001 certificates
- 3 stage compression design
- Intelligent digital pressure controller for automatic start/stop
- The motor has overload, overheating and low voltage protection
- Providing 225 Bar/330 Bar filling pressure for options
- Cooling method: air cooling
- Automatic timing for working
- Automatic stop is equipped
- Automatic start is optional
- Automatic condensate drain is optional

Technical Data

Model	NRW200	NRW265	NRW300
Charging rate (L/min)	200	265	300
Max. pressure (bar)	225 / 330	225 / 330	225 / 330
Number of stages	3	3	3
Drive	Three-phase 380V,50HZ	Three-phase 380V,50HZ	Three-phase 380V,50HZ
Speed (rpm)	1300	1450	1600
Power (kw)	4.0	5.5	5.5
Horse (hp)	5.5	7.5	7.5
Weight (kg)	118	118	118
Dimension (mm)	850*490*620	850*490*620	850*490*620
Air supply interface	G5/8"	G5/8"	G5/8"

Note: Motors with different voltages of 50HZ or 60HZ can be customized.


Standard Configuration

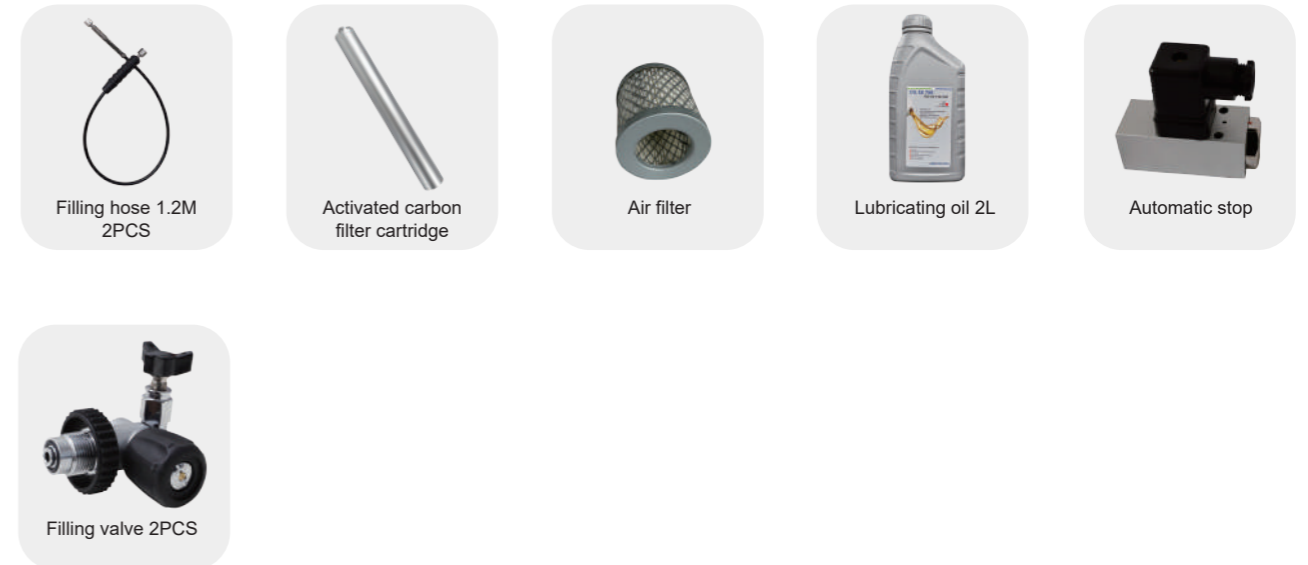

Optional Configuration



Product Details

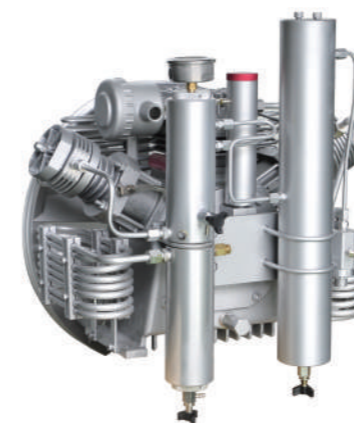

Compressor block



Intelligent digital pressure control panel



Motor ON/OFF switch box