

## Product Introduction

NRW200Y/265Y/300Y series air compressors adopt oil pump lubrication. It has stable performance and compact design structure. The standard configuration includes two filling hoses and two filling valves, which can simultaneously inflate two cylinders to improve efficiency. It's applicable for use in firefighting, diving, chemical, rescue, etc. This series is driven by three-phase motor.

## Features

- Air quality conforms to EN12021
- CE, CCS, ISO9001 certificates
- 3 stage compression design
- The motor has overload, overheating and low voltage protection
- Providing 225 Bar/330 Bar filling pressure for options
- Lubrication method: oil pump
- Cooling method: air cooling
- Manual stop is standard
- Automatic stop is optional
- Automatic condensate drain is optional




## Technical Data


Model	NRW200Y	NRW265Y	NRW300Y
Charging rate (L/min)	200	265	300
Max. pressure (bar)	225/330	225/330	225 / 330
Number of stages	3	3	3
Drive	Three-phase 380V,50HZ	Three-phase 380V,50HZ	Three-phase 380V,50HZ
Speed (rpm)	1180	1380	1600
Power (kw)	4.0	5.5	5.5
Horse (hp)	5.5	7.5	7.5
Weight (kg)	120	120	120
Dimension (mm)	1070*550*591	1070*550*591	1070*550*591
Air supply interface	G5/8"	G5/8"	G5/8"

Note: Motors with different voltages of 50HZ or 60HZ can be customized.


## Standard Configuration




Filling hose 1.2M  
2PCS



Activated carbon  
filter cartridge



Air filter




Lubricating oil 2L




Filling valve 2PCS

## Optional Configuration



DIN/INT Adaptor




Automatic  
condensate drain



Automatic stop

## Product Details

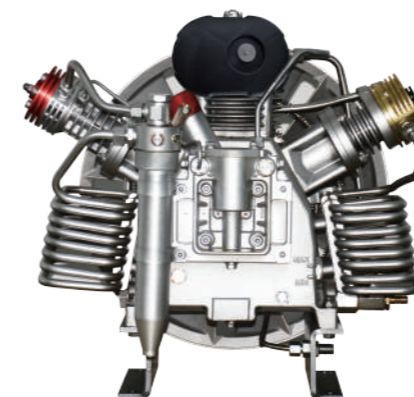

Compressor block



Motor ON/OFF switch box